ARCHITECTURAL CATALOGUE

Aluminium Windows, Doors and Facade Systems

RWT95

RWT95

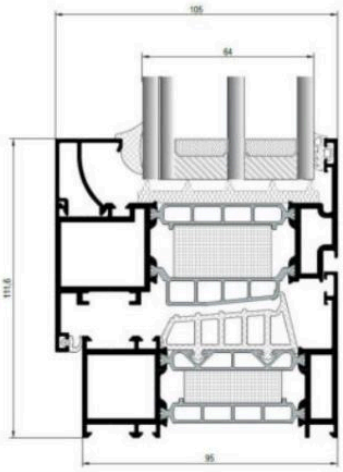

TECHNICAL PROPERTIES

FRAME DEPTH	95mm
SASH DEPTH	105mm
PROFILE WALL THICKNESS	2mm
MAXIMUM GLASS THICKNESS	
THERMAL BREAKS	54mm

APPLICATION OPTIONS	WINDOW	
INWARD OPENING	•	
BOTTOM-HUNG OPENING	•	
TILT AND TURN OPENING	•	

PERFORMANCE VALUES

THERMAL TRANSMITTANCE (Uf) - EN 10077-2	1,08~1,25 W/m²K
PASSIVE HOUSE THERMAL PERFORMANCE	Uw: 0,8 W/m²K Ug: 0,7 W/M²K

For the Passive House option, please contact the technical office.